

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**


Defective images within this document are accurate representation of  
The original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 1 092 447 A2**

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
**18.04.2001 Bulletin 2001/16**

(51) Int. Cl.<sup>7</sup>: **A61M 15/08**

(21) Application number: **00121571.4**

(22) Date of filing: **02.10.2000**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE**  
Designated Extension States:  
**AL LT LV MK RO SI**

(30) Priority: **14.10.1999 US 417345**

(71) Applicant:  
**Becton, Dickinson and Company  
Franklin Lakes, New Jersey 07417 (US)**

(72) Inventor: **Alchas, Paul  
Wayne, New Jersey 07470 (US)**

(74) Representative:  
**von Kreisler, Alek, Dipl.-Chem. et al  
Patentanwälte,  
von Kreisler-Selting-Werner,  
Bahnhofsvorplatz 1 (Delchmannhaus)  
50667 Köln (DE)**

### (54) Nasal delivery device including spray nozzle

(57) A nasal delivery device is provided for delivering substances such as liquid drugs, vaccines and the like to a nasal passage. The nasal delivery device preferably comprises a drug container such as syringe and a separable spray nozzle. The spray nozzle includes a rigid plastic cap having a spray aperture at a distal end of the nozzle for delivering the liquid substance to the nasal passage. Attachment means is provided for attaching the spray nozzle to the syringe at the time of the delivery of the liquid substance to the nasal passage. The nozzle defines a conduit that allows fluid communication from the syringe to the spray aperture. The nozzle includes an internal valve between the spray aperture and the syringe for allowing only pressurized liquid substance to flow through the conduit and the aperture so that a mist or spray is delivered through the spray aperture.

EP 1 092 447 A2

## Description

### FIELD OF THE INVENTION

[0001] The present invention generally relates to delivery systems for delivering substances such as drugs, vaccines and the like, and more specifically relates to a delivery device for delivering such substances intranasally, i.e., through the nose, including a spray nozzle for use with a prefilled drug container such as a syringe. In addition, the present invention relates to a nasal delivery device and more particularly to a removable spray nozzle for use with standard syringes.

### BACKGROUND OF THE INVENTION

[0002] Many injectable drugs are packaged and distributed in hypodermic syringes that will eventually be used to administer the drug to the patient. The syringe is the low cost, efficient, sterile instrument of choice for delivering liquid drug through a hypodermic needle. The hypodermic syringe also can be an excellent storage device for drug placed in it by a pharmaceutical manufacturer or hospital pharmacy.

[0003] Syringes may also prove useful for distributing and administering drugs even where a hypodermic injection is not desired. Delivering a therapeutic liquid as a spray through the nasal passageway is preferred to deliver certain therapeutic liquids under certain conditions. There have been several proposed devices to make syringes useful as nasal sprayers.

[0004] U.S. Patent No. 5,601,077 to Imbert discloses a nasal syringe sprayer for discharging the liquid contents of the syringe in a spray through the nasal passages. However, the use of that device is limited to pre-stored, liquid stable drugs. That is, the sprayer of the patent cannot be used with drugs that need to be maintained in powder or lyophilized form and reconstituted just prior to intake. Additionally, the sprayer tip of that patent does not allow an individual to load the syringe with a liquid medication from a standard vial since the nasal spray nozzle cannot be inserted into such vials to extract the contents of the vial for loading the syringe.

[0005] U.S. Patent No. 4,767,416 to Wolf et al. discloses a flexible, removable spray nozzle for a syringe. The spray nozzle may be attached directly to a luer fitting of a syringe or may be adapted to fit over and attached to a hypodermic needle secured to the luer fitting. In either case, the spray nozzle fits onto the syringe in order to prevent back flow and leakage of the liquid at the attachment of the spray nozzle to the syringe. One shortcoming of the device is that the nozzle does not prevent unpressurized liquid from flowing through the opening at the tip of the spray nozzle.

[0006] In view of the shortcomings and drawbacks of currently available or proposed systems, it is desirable to provide a removable spray nozzle for use with hypodermic syringes that provides a leak-free seal and

prevents unpressurized liquid from flowing out the opening at the spray nozzle.

### SUMMARY OF THE INVENTION

[0007] In contrast to the prior devices discussed above, it has been found that a nasal delivery device particularly suited for use in intranasally delivering substances such as drugs, vaccines and the like can be constructed in accordance with the present invention. Specifically, the invention is directed to a nasal delivery device having a removable spray nozzle adapted for delivering liquid substances such as a drug from a syringe to a nasal passage. The spray nozzle includes a plastic rigid cap having a spray aperture at one end of the nozzle for delivering the liquid substance to the nasal passage. The spray nozzle is attached to the syringe when delivery of the liquid substance will be sprayed into the nasal passage. The spray nozzle includes an internal valve that allows pressurized liquid substance to flow through the nozzle and out of the spray aperture while also preventing unpressurized liquid from flowing through the spray aperture.

[0008] In the preferred embodiment, the spray nozzle has a flange at a proximal end to prevent an individual from over-inserting the nozzle into the nasal passage. The nozzle may also include a resilient, elongate sleeve extending from the nozzle that is received over an elongate barrel of the syringe. The elongate sleeve includes a flange at an end to aid a user in grasping the assembly and delivering the liquid from the syringe to the nasal passage.

[0009] The various features and advantages of this invention will become apparent to those skilled in the art from the following detailed description of the currently preferred embodiments. The drawings that accompany the detailed description can be briefly described as follows.

### BRIEF DESCRIPTION OF THE DRAWINGS

[0010]

Figure 1 is a perspective view of a nasal delivery device designed according to this invention.

Figure 2 is a side elevation view of the nasal delivery device of Figure 1.

Figure 3 is a side elevation view of the nasal delivery device of Figure 1 viewed from the one end.

Figure 4 is a partial cross-sectional view of the nasal delivery device of Figure 3 taken along line 4-4.

Figure 5 is a cross-sectional view of the nasal delivery device of Figure 2 taken along line 5-5.

Figure 6 is an enlarged cross-sectional view of the spray nozzle of the nasal delivery device illustrating a two-component spray nozzle assembly having one-way valve features.

at least one passage 46a through the skirt 46. This passage allows fluid to be drawn into the syringe when using an appropriately configured vial adapter.

[0023] As best seen in Figures 2, 4 and 5, a dosage limiter 47 can be employed. The limiter 47 partially surrounds the plunger rod 31 so that the limiter 47 will not fall off the plunger rod 31 under its own weight but may be forcibly removed from the plunger rod 31 without eliminating the ability of the nasal delivery device to deliver the substance from the chamber through the aperture 41. The limiter 47 may be designed with a thin cross-section so that it will deflect and snap over the plunger rod 31 or the plunger rod 31 may be designed to deflect under the forces of the limiter 47 during attachment or removal. Alternatively, both elements may be designed to deflect partially during installation and removal of the limiter 47. A finger tab portion 49 facilitates installation and removal. A plurality of ribs 50 provide a better grip.

[0024] The limiter 47 is adapted to interact between a radially extending projection on the plunger rod 31 such as flange 32 and proximal end 22 of the barrel 21 which includes a barrel flange 26 to limit the distal motion of the plunger rod with respect to the barrel 21. For example, the length of the limiter 47 can correspond to one-half of the volume of liquid substance in the chamber 23, which proves useful to deliver equal doses into each nostril.

[0025] In use, the nasal delivery device can be inserted into one nostril of the user while it is fully loaded such as illustrated in Figure 4. Pressure on the plunger rod flange 22 in a distal direction (i.e., right to left according to the drawing) will cause the liquid substance 35 to flow through the passageway 28 into the conduit 39 of the cap 38, deflecting the skirt portion 46 of the flexible valve 45, and through the spray aperture 41. The plunger rod 31 can be moved until further distal motion is prevented by contact of the plunger rod flange 32 with limiter 47 which, in turn, contacts barrel flange 26. The plunger rod 31 can no longer be moved in a distal direction and approximately one-half of the liquid substance still remains in the syringe.

[0026] The user then removes the nasal delivery device from one nostril, pulls the limiter 47 off the plunger rod 31 and prepares to deliver a dose to the other nostril. With the limiter 47 now removed, the nasal delivery device may now be placed so that the spray nozzle is in the other nostril and the remaining half of the liquid substance 35 may be delivered.

[0027] An alternative embodiment nasal delivery device 55 is illustrated in Figure 8. In this embodiment, the structure of the nasal delivery device is substantially similar to the nasal delivery device of the embodiment of Figures 1-7. Accordingly, substantially similar components that perform substantially similar functions will be numbered identically to the components of the embodiment of Figures 1-7 except a suffix "a" will be used to identify those components in Figure 8.

[0028] In this alternate embodiment, the spray nozzle 37 preferably includes a generally resilient, elongate sleeve member 64 extending from the cap 38a. Elongate sleeve member 64 may be a unitary sleeve member that fully surrounds the syringe body or may include two finger-like portions 66, as shown in Figure 8. A flange 68 provides an increased surface area to aid a user in delivering the liquid from the syringe to the nasal passage. The increased surface area is more easily retained against an individual's index and fore fingers than the typical end 22a of the syringe body. Additionally, pressure from the individual's fingers serves to maintain the nozzle 37 on the syringe.

[0029] The embodiment of Figure 8 preferably includes a valve member in the cap portion 38a as described above to ensure a spray or mist delivery. The adapter 37a can include the snap fit shown in Figure 7.

[0030] There are several advantages provided by the present invention. The inventive arrangement having a nasal sprayer adapter can be used to deliver the substance that is targeted for nasal delivery but is not liquid-stable and, therefore, needs to be stored in powder or lyophilized form in a separate, appropriate vial. Other nasal delivery device devices that do not have a cap like that of this invention cannot accommodate such substances.

[0031] Less water vapor is lost from a syringe that works with the inventive adapter since the plastic cap need not be permanently attached to the syringe prior to use. Additionally the likelihood for pressure valve activation during plunger rod assembly and handling is lessened since the spray nozzle need not be attached to the syringe until it is ready for use. Furthermore, stability testing regarding compatibility issues is simplified since the plastic spray nozzle does not interfere with the liquid substance over a long period of time.

[0032] The advantages provided by this invention render it more useful for use with prefilled syringes. One method of prefilling syringes to be used as a nasal delivery device is schematically shown in flow chart form in Figure 9.

[0033] A supply of syringe barrels 200 includes the desired form of syringe, such as those illustrated and discussed above. A locally controlled environment 202 preferably is maintained in a known manner. The locally controlled environment 202 preferably is situated to immediately accept the syringes without requiring any intermediate cleaning or sterilizing steps between the supply 200 and the environment 202.

[0034] In one example, the syringe barrels are washed with air at 204 to remove any particulates from the syringes. The syringes preferably are then coated at 206 with a lubricant such as a lubricating silicone oil on the inner surface. The lubricant facilitates moving the stopper 29 and plunger rod 31 through the syringe during actual use of the device.

[0035] The end of syringes that eventually receive the spray nozzle may be capped with a tip cap within the

environment 202. In one example, tip caps are supplied at 208. The tip caps are air washed at 210. The cleaned tip caps and syringe barrels are conveyed to an assembly device 212 where the tip caps are secured onto the syringes. The syringe barrel assemblies are then conveyed to a filling station 214 to be filled with the desired substance.

[0036] Once filled as desired, the stoppers 29 are inserted into the open end of the syringes at 220. Prior to inserting the stoppers 29, they preferably are assembled with the plunger rods 31 at 222 and lubricated at 224 with a conventional lubricant in a known manner. The assembled, filled syringes preferably are inspected at 226 for defects and discharged from the locally controlled environment.

[0037] The syringes typically will be sterilized at 230 and packaged at 232 into individual packages or into bulk packaging depending on the needs of a particular situation. Suitable sterilization techniques are known and will be chosen by those skilled in the art depending on the needs of a particular situation or to accommodate the properties of a given substance. Sterilizing a device designed according to this invention can be completed before or after packaging.

[0038] Variations of the filling steps are within the scope of this invention. For example, the stopper can be inserted first, then fill the syringe, followed by applying a tip cap.

[0039] The actual insertion of the desired substance can be accomplished in any of several known manners. Example filling techniques are disclosed in U.S. Patent Nos. 5,620,425 to Hefferman et al.; 5,597,530 to Smith et al.; 5,537,042 to DeHaen; 5,531,255 to Vacca; 5,519,984 to Veussink et al.; 5,373,684 to Veussink et al.; 5,265,154 to Liebert et al.; 5,287,983 to Liebert et al.; and 4,718,463 to Jurgens, Jr. et al., each of which is incorporated by reference into this specification.

[0040] The description just given is exemplary rather than limiting in nature. Variations and modifications may become apparent to those skilled in the art that do not necessarily depart from the basis of this invention. The scope of legal protection given to this invention can only be determined by studying the following claims.

#### Claims

1. A nasal spray nozzle for use with a drug container such as a syringe for delivering liquid substances such as drugs, vaccines and the like into a nasal passage, comprising:

a rigid cap having a spray aperture at one end for delivering the substance to the nasal passage and an opening at a second end that is able to be selectively attached to a syringe containing the substance, the cap including an

internal surface that defines a conduit between the opening and the spray aperture to allow the substance to flow toward the spray aperture; and

an internal valve supported within the conduit between the spray aperture and the opening, the valve only allowing the substance to flow through the spray aperture under pressure such that a spray mist of substance is delivered from the spray aperture.

2. The spray nozzle as recited in claim 1 wherein the valve includes a generally flexible member supported within the cap that is biased into engagement with the internal surface of the cap such that only pressurized substance flows past the flexible member and toward the spray aperture in a single direction.
3. The spray nozzle as recited in claim 1, wherein the valve is integrally formed within the cap and includes a flexible member that is biased to close off the conduit such that only pressurized substance flows past the flexible member in a single direction toward the spray aperture.
4. The spray nozzle as recited in claim 1 wherein the cap is made from a rigid plastic material and includes a structure adjacent the opening that facilitates attaching the cap to the syringe and precludes subsequent removal of the cap.
5. The spray nozzle as recited in claim 1 including a flange extending radially outward from the cap near the opening for preventing over-insertion of the cap into the nasal passage.
6. The spray nozzle as recited in claim 1 wherein the cap includes a generally elongated body portion that extends from the opening in a direction opposite from the conduit, the body portion having a sidewall that is adapted to be received over an elongate syringe body and including a flange at a terminal end of the body portion that is adapted to accommodate a finger of a user to facilitate grasping the cap and delivering the substance from the syringe to the nasal passage.

7. The spray nozzle as recited in claim 6, wherein the elongate body portion is generally cylindrical and the sidewall is continuous.
8. The spray nozzle as recited in claim 6, wherein the elongate body portion has two generally arcuate sidewall portions that are spaced apart from each other, each sidewall portion having a flange at the terminal end.

9. The spray nozzle of claim 6, including an extended external surface on the cap near the opening that prevents over-insertion of the cap into the nasal passage, the extended external surface having an outside dimension that is smaller than an outside dimension of the flange. 5
10. A nasal delivery device for delivering liquid substances such as drugs, vaccines and the like to a nasal passage, comprising: 10
- a syringe having a body with an outlet opening at one end; and
- a spray nozzle including 15
- a separate, generally rigid cap having an internal surface that is selectively sealingly secured to the syringe body adjacent the outlet opening, the cap including an internal surface that defines a conduit in fluid communication with the outlet opening, the cap including a spray aperture at a distal end for delivering the liquid substance to the nasal passage; and 20
- a valve supported by the cap between the spray aperture and the outlet opening that allows only pressurized substance to flow through the conduit and the spray aperture while also preventing unpressurized substance from flowing through the spray aperture. 25 30
11. The device of claim 10, wherein the syringe body includes a luer tip near the outlet opening and the cap includes cooperating structure for engaging the luer tip of the syringe. 35
12. The device of claim 10, wherein the syringe includes a groove formed on an exterior surface near the outlet opening and the cap includes a corresponding projection on the internal surface that is at least partially received by the groove. 40
13. The device of claim 12, wherein the projection is sufficiently rigid such that the cap is fixedly secured to the syringe when the projection is received by the groove precluding subsequent removal of the spray nozzle. 45
14. The device of claim 10, wherein the cap includes a radially outward projecting flange for preventing over-insertion of the nozzle into the nasal passage. 50
15. The device of claim 10, wherein the syringe includes an elongate barrel that defines a chamber for containing the substance prior to delivery of the liquid and a plunger rod for pushing the liquid out of the barrel, and wherein the cap includes a generally 55
- elongated body portion having a sidewall that is received over the syringe barrel and includes a flange at a terminal end of the body portion that is adapted to accommodate a finger of a user to facilitate grasping the cap and pushing the plunger rod to deliver the substance from the syringe to the nasal passage.
16. The device of claim 15, wherein the elongate body portion is generally cylindrical and the sidewall is continuous.
17. The device of claim 15, wherein the elongate body portion has two generally arcuate sidewall portions that are spaced apart from each other, each sidewall portion having a flange at the terminal end.
18. The device of claim 15, including an extended external surface on the cap near the opening that prevents over-insertion of the cap into the nasal passage, the extended external surface having an outside dimension that is smaller than an outside dimension of the flange.
19. The device of claim 15, including a dosage limiter that permits a selected amount of the substance to be delivered through the spray aperture, the dosage limiter limiting a range of motion of the plunger rod relative to the barrel.
20. The device of claim 19, wherein the dosage limiter is selectively placed in a first position relative to the barrel and the plunger to permit approximately one half of the substance to be delivered through the spray aperture and then selectively removed such that a second half of the substance can be subsequently delivered through the spray aperture.
21. The device of claim 10, wherein the syringe includes an elongate barrel that defines a chamber and said chamber prefilled with at least one substance to be nasally delivered such as a drug, vaccine and the like.
22. A method of intranasally delivering at least one substance such as a drug, vaccine and the like into a nasal passage, comprising the steps of:
- attaching a nasal spray nozzle to a drug container such as a syringe, with said nasal spray nozzle including a rigid cap having a spray aperture at one end for delivering the substance to the nasal passage and an opening at a second end that is able to be selectively attached to the syringe containing the substance to be delivered, the cap including an internal surface that defines a conduit between the opening and the spray aperture to allow the

substance to flow toward the spray aperture,  
and an internal valve supported within the conduit between the spray aperture and the opening, the valve only allowing the substance to flow through the spray aperture under pressure such that a spray mist of the substance may be delivered from the spray aperture;

inserting at least a portion of the nasal spray nozzle with the syringe attached thereto into one nostril of a person to whom the substance is to be intranasally delivered, said syringe including a plunger rod;

applying pressure on the plunger rod in a distal direction to cause a predetermined amount of the substance to flow through a passageway into the conduit of the cap such that a spray mist of the substance is delivered from the spray aperture into the nostril of the person; and

removing the nasal sprayer nozzle from said nostril.





23. The method of claim 22, further comprising the steps of:

removing a limiter from the plunger rod;  
inserting at least a portion of the nasal spray nozzle with the syringe attached thereto into another nostril of the person to whom the substance is to be intranasally delivered;  
applying pressure on the plunger rod in a distal direction to cause a predetermined amount of the substance to flow through a passageway into the conduit of the cap such that a spray mist of the substance is delivered from the spray aperture into the other nostril of the person; and  
removing the nasal sprayer nozzle from said other nostril.




24. The method described in claim 22 wherein said predetermined amount of the substance delivered into the nostril of the person is substantially equal to about half the amount of the substance contained in the syringe.

50

55

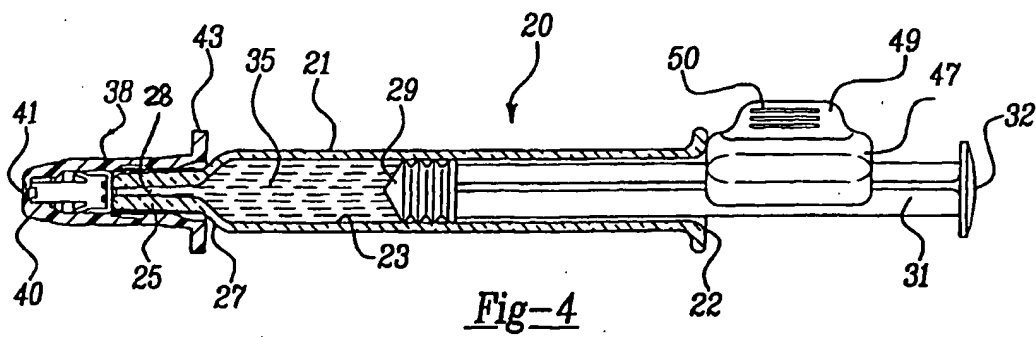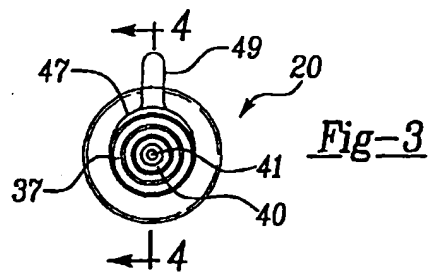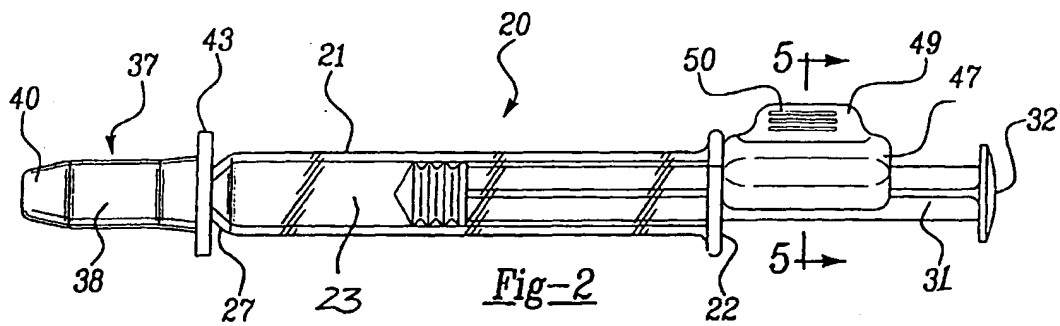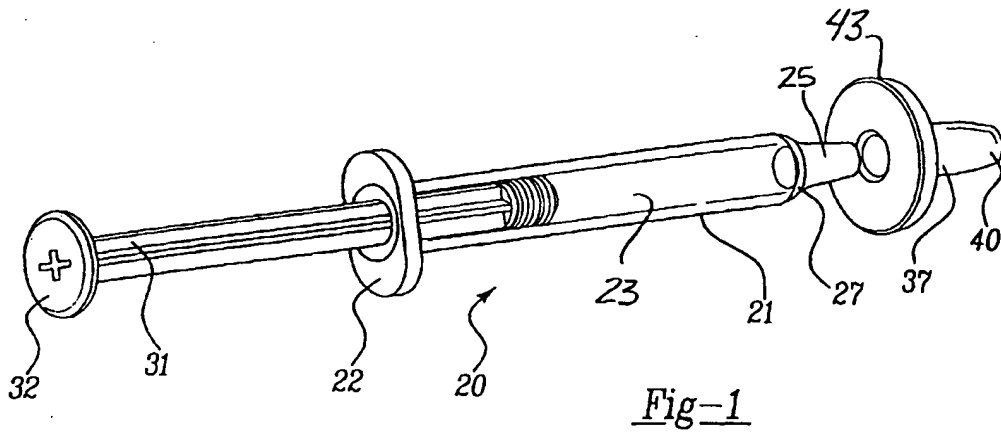



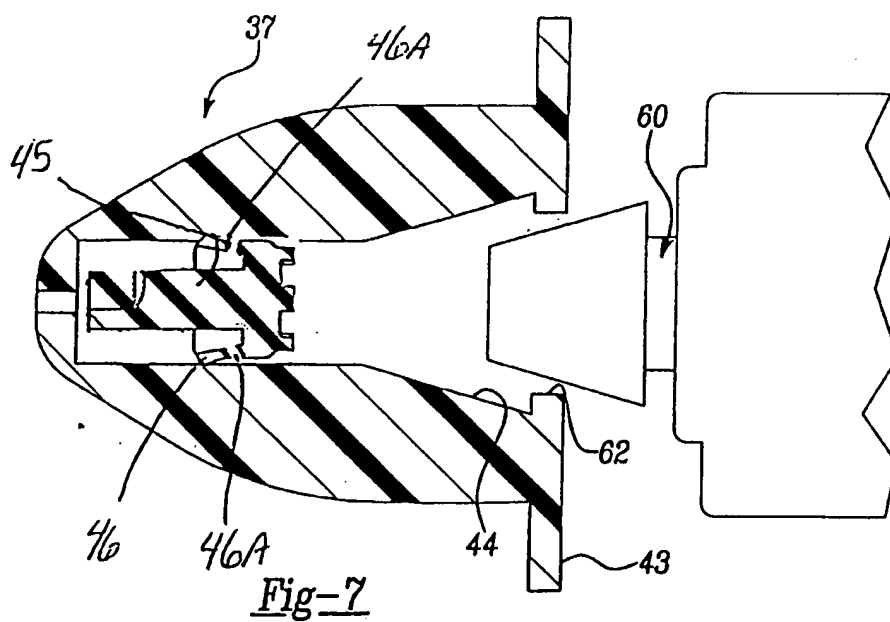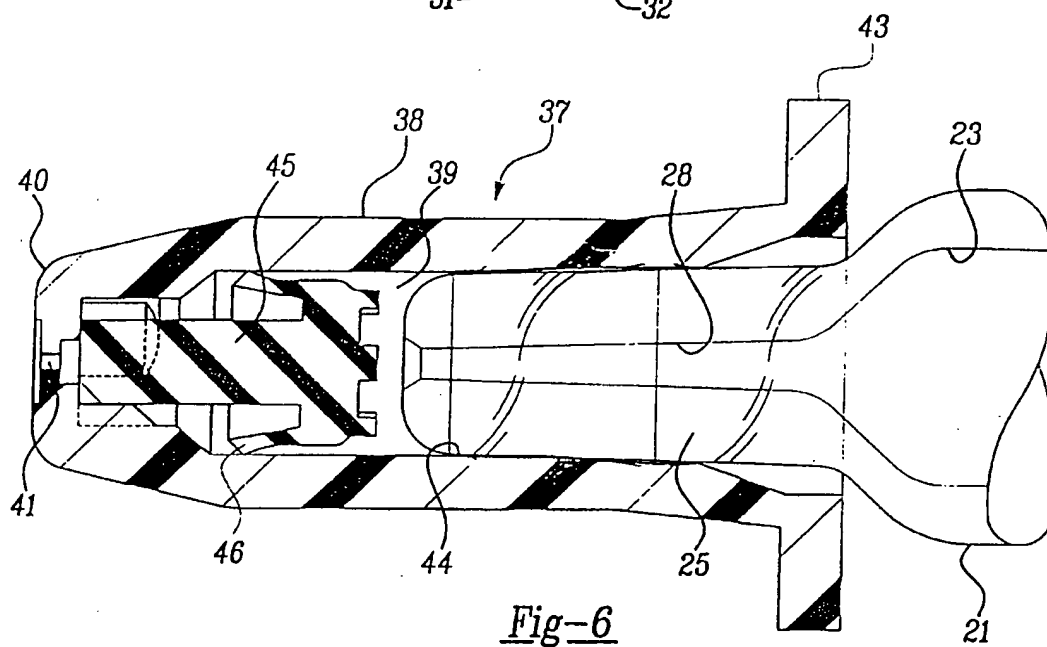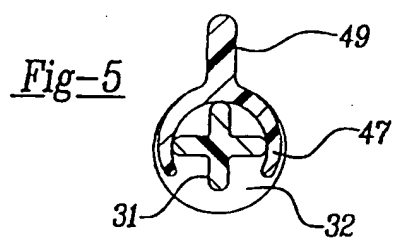

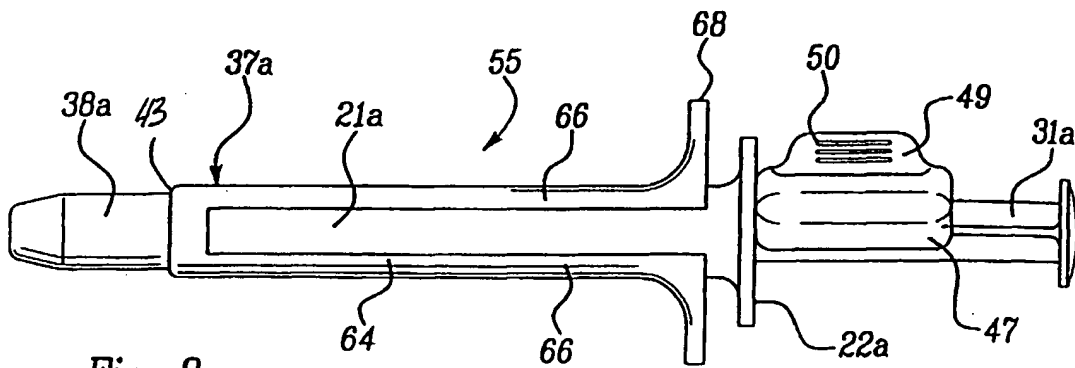


Fig-8

Fig 9

